


## Structure-attachment Fitting

UTT10Q

### Structural Attachment

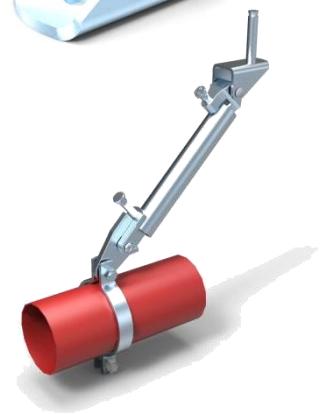

**Function:** Designed for bracing pipe against sway and seismic disturbance. The pipe attachment component of a sway brace system used in conjunction with a UTT Manufacturing structural attachment fitting, and joined together with a bracing pipe element forms a complete sway brace assembly. Sway brace assemblies are intended to be installed in accordance with NFPA 13 and the manufacturer's installation instructions.

**Type:** Sprinkler Pipe Sch 10, Sch 40, GB/T 3091, JIS G3454

**Size:** One size fits braced pipe up to 8", with 1/2" bolt hole for structure.

**Material:** Carbon steel & Ductile iron QT450

**Finish:** Electro - galvanized

**Approvals:**



UL Maximum Design Load				
Brace Member	lbs.	KN	Wt. Each	
			lb.	kg
1" SCH40 pipe	1885	(8.38)	1.82	(0.83)

Step 1	Step 2	Step 3
		
<b>Install:</b>		
The connection mode of base part connected with the building; The accessories connected with the base part is sch40 1-inch pipe; The pipe must be clamped to the bottom of the base part, then fixed with the shear bolt; Tighten the shear bolt until heads break off.		